

ASSEMBLY INSTRUCTIONS FOR DIRT KING TRICYCLES - WAGONS - CARTS

Child's Trike
DK-250



Patriot
DK-250 Pat



Child Dually Trike
DK-251



Big Kids Trike
DK-252



Little Twister
DK-350-R

DK WindRoamer



DK-300- PK
Step-Thru

Pink



**Adult
Dually Trike**
DK-252



DK-300- Y
Step-Thru

Yellow

DK Cruiser Wagon



CW-4



DK Cruiser Cart

CC-2

↓ **TRIKE BOX CONTENTS** ↓

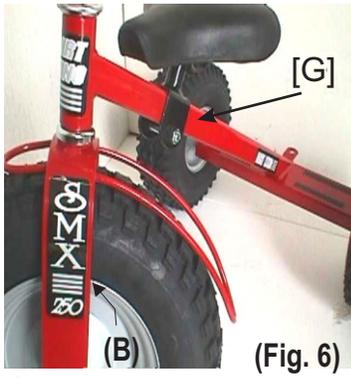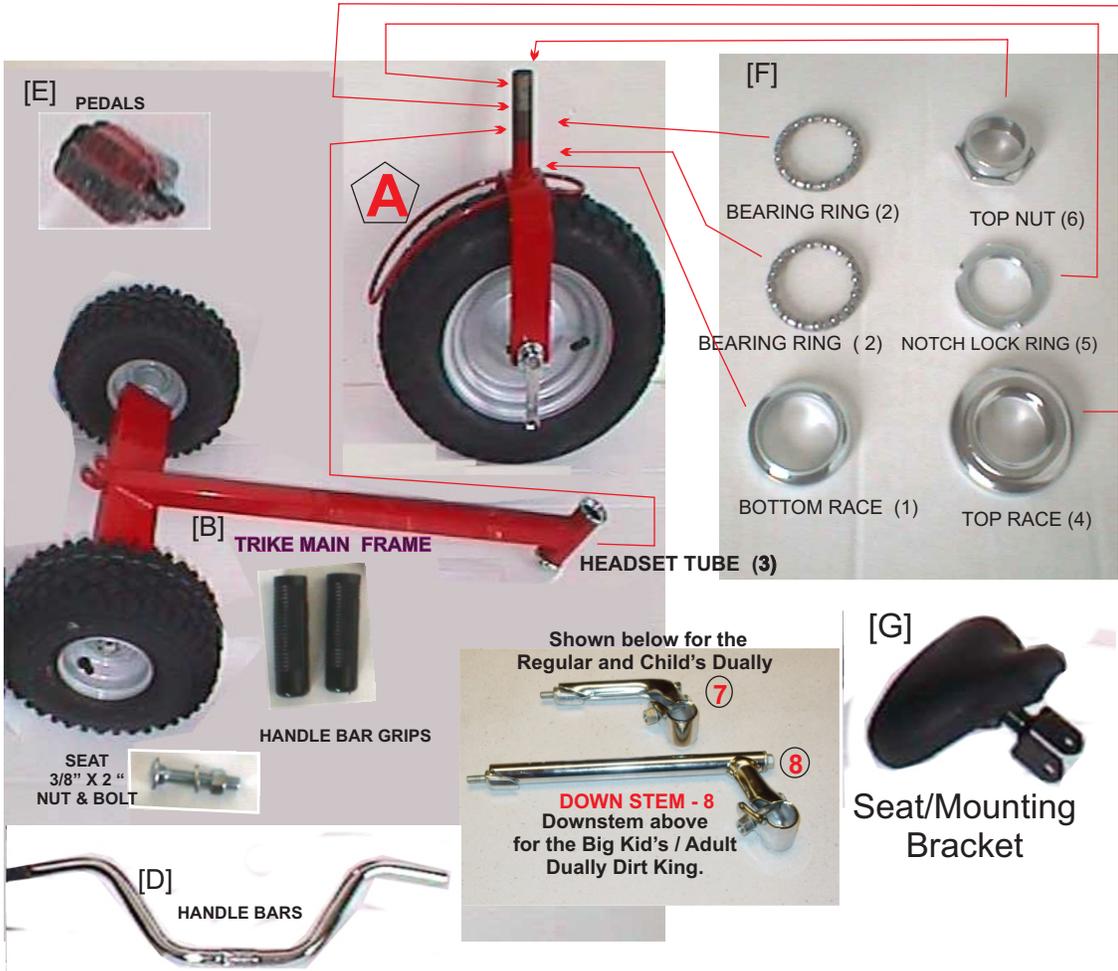



ASSEMBLY INSTRUCTIONS

Step 1: (STRONGLY RECOMMENDED) Remove all contents from box and layout parts as shown..

Step 2: Open Parts Package and identify bearing headset parts as shown in photo on the previous page.

Step 3: Take Wheel/Fork Assembly  place bottom race (1) on the threaded stem, next place one bearing rings (2) on the threaded stem as shown in photo on previous.

Step 4: Take Trike Main Frame and place over the threaded stem on the Wheel/Fork Assembly, then place second bearing ring (2) on threaded stem. This should be followed by the Top Race (4) which screws onto the threaded stem. The Top Race should be tightened by hand as tight as possible but not so tight as to restrict the wheel assembly from moving back and forth freely.

Step 5: Screw the Notched Lock Ring (5) on the threaded stem. Use one pair of pliers to hold Top Race (4) from turning and the other pair of pliers to tighten the Notched Lock Ring (5) as tight as possible. After the Notched Locking Ring (5) is-tight check the Wheel/Fork assembly that the movement has not been restricted. (If the wheel assembly does not turn freely loosen (4) & (5) and repeat the process. This is followed by screwing the Top Nut (6) on the threaded stem and tightening until snug.

Step 6: Insert **Down Stem (7 or 8)** in threaded stem as shown in (Fig. 4). Use 1/2" open end wrench or adjustable type wrench and tighten bolt making sure that down stem is in alignment with the front tire. The Handle Bar [D] is then place through the Down Stem and a 9/16" wrench is used to tighten handle bar at desired position. To put handle bar grips on the handle bar the job is simplified if the inside of the grips are wet. Water will work, but a mixture of liquid dish soap and water works much better.

Step 7: Screw Pedal [E] marked - R- into crank arm as shown in (Fig 5) right side of the trike as you are setting on trike) and tighten with 9/16" open end wrench or adjustable type wrench. Repeat process for the pedal on left side by turn the threads to the left.

Step 8: Place Seat/Mounting Bracket [G] on main frame for the Regular Dirt King or Child's Dually and insert 3/8" x 2" bolt through bracket from the side with the square hole in it, put on lock washer and nut and tighten. If you have the Big Kid's or Adult Dually trikes your trike will come with a mounting bracket as shown in the photo's below. The (Tube) or (Shock) will need to be attached with the 5/16" x 1 1/2" nut and bolt provide in the parts package. The seat and seat mounting bracket will than need to be mounted as shown in the photos.

SEATING ARRANGEMENTS



Seating shown above is for the Regular DK Trike and Child's Dually Trike.



Seating shown above is for the Big Kid's Dually Trike.



Seating shown above is for the Adult Dually Trike.

DK WindRoamer



The DK WindRoamer comes in Yellow and Pink. Both models come with front fork and wheel assembly already installed.

The basket mounting bracket and ringer bell comes attached to the handle bars. The large adult padded seat is already attached to the frame of the trike. The following page shows photos and has written instructions telling how to install the downstem and handlebars, along with instructions and photos showing the installation of the spring loaded shock.

Beside each of the assembly instruction photos is also a QR Code for those who want to watch videos for each step of the assembly.

“WindRoamer” ASSEMBLY INSTRUCTIONS





Unpack Trike

The Step-Thru WindRoamer comes partially assembled. First remove basket and handlebar assembly along with surrounding cardboard. Remove front wheel and frame assembly. Remove the foam protective sheets.

Installing Handlebars & Basket.

Insert handlebars & downstem into headset tube as shown in photo and tighten bolt with 1/2” ratchet drive or wrench. Slide basket on pre-installed basket mounting bracket.

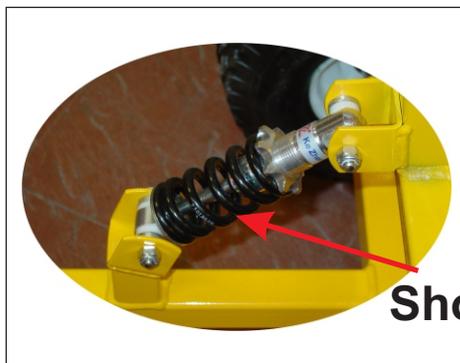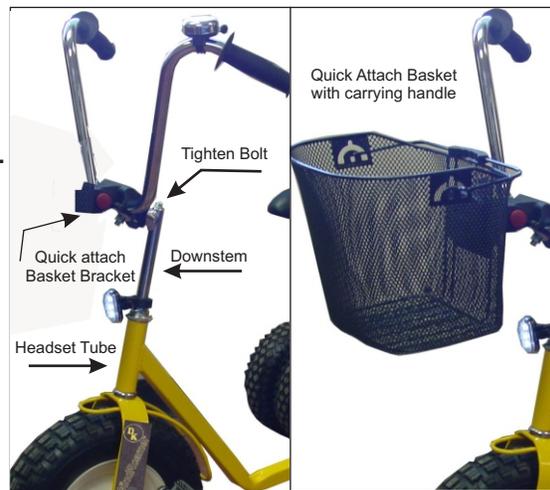

Remove packing material from shock. Using the 5/16” x 1 3/4” bolt and nut insert shock into clevis install bolt and tighten nut with 1/2” wrenches.

Tools Required: 2 - 1/2” wrenches or 1/2” wrench and 1/2” ratchet wrench



Little Twister

DK-350-R



The Dirt King family of trikes, wagon and carts have been giving pleasure to both kids and adults alike for over 30 years. The Little Twister is our newest addition to the Dirt King family of quality built heavy duty riding toys. Spinning around on this dynamic trike is sure to provide young and old with hours of extreme fun and great exercise!

The Dirt King® Little Twister Tricycle is built tough and rides like no other trike. This Dirt King® is virtually indestructible, equipped with steel wheel and pneumatic tire on the front and rubber caster wheels on the rear with 5/8" steel ball bearings. The large dish seat and tilting handlebars allows the tricycle to adapt from youngsters to adults for a thrilling ride and some great healthy exercise.

Although the Little Twister may be used on uneven rugged ground, it's much more fun and exciting to ride on a smoother surface.

Check out a couple of our **YouTube Videos**

<http://www.youtube.com/watch?v=VwWqI8ImI0Y>

<http://www.youtube.com/watch?v=1OPR8VdUOho>

Or scan bar codes with
your smart phone



**Whether you are 4 or 74 the Little Twister
will tickle your Funny Bone!!!**



SAFETY WARNING



Safety "WARNING"



Please read and follow all safety rules for riding a tricycle. Child's Tricycle should be ridden with adult supervision. All safety rules should be obeyed. Never ride on a street, down steep slopes or sloped driveways. Always wear shoes and head protection.

Warning

*All Dirt King products are designed for use on level surfaces. Use only at safe, slow speeds. The safe operation of these products is the responsibility of the user and guardian.

Protect Your Head. Wear A Helmet

*Never ride a tricycle without a helmet. The National Highway Traffic Safety Administration (NHSTA) and the U.S. Consumer Product Safety Commission (CPSC) recommend that children wear a helmet that complies with the CPSC standard.

* Tricycle, Big Kids and Adult Trike helmets can reduce head injuries by 85 percent. Select a helmet that fits snugly and sits flat on the head.

*For children, use the extra padding that comes with the helmet to ensure a proper fit. This padding can be removed as the child head grows.

*Assure Tricycle, Big Kids and Adult Trike Readiness. Make Sure Your Tricycle, Big Kids or Adult Trike is Adjusted Properly.

*Before using your trike, check to make sure all parts are secure and working well. The handlebars should be firmly in place and turn easily. Your wheels must be straight and secure. Make sure your seat placement is adjusted to your size

No Brakes. Always Control Your Speed

*Always control your speed due to no brakes. If you cannot stop quickly, make sure to control your speed.

*Ride slowly in wet weather, ice, other adverse weather conditions and on unlevel surfaces.

See and Be Seen

*Wear clothes that make you more visible. Keep children away from places where there are moving vehicles.

Stay Alert. Always Keep A Lookout for Obstacles in Your Path

*Stay alert at all times. Watch out for potholes, cracks, expansion joints, railroad tracks, wet leaves, drainage grates, or anything that could make you fall. Ideally, sidewalks and playgrounds are best place to ride.

*Be especially careful in wet weather and when there could be ice or frost on your path.

Adult Trike and Big Kids Trike are Considered Vehicles on the Road

*Just like bicycles, the Adult Trike and Big Kids Trike are considered vehicles. If riding on the road, which we do not recommend, you must obey the same rules as motorists.

*Read your State drivers handbook, and learn and follow all the traffic signs, laws, and rules for operating a vehicle, in this case- a trike on the road

Maintenance Tip: Your Dirt King trike comes with 2-ply pneumatic tires and if you live in an area or are riding your trike where stickers and more especially goat head stickers are a problem, we suggest that you use a tire sealant product like Never Leak or Goop to keep your tires from losing air or going flat.

The DK Cruiser Wagon



Parts List for Cruiser Wagon

- 1 - Chassis / Tub Assembly
- 1 - Tongue Assembly (Handle)
- 4 - Wheels
- 1 - Hardware Pack: 4) Axle Caps; 1) 3/8"x 3" Bolt and Lock Nut; 4) 1/4"x 3/4" stainless steel screws and nuts

Instructions for Assembly

Tools needed: 2) 9/16" wrenches, 1/2" wrench, 7/16" wrench, light hammer, #3 Philips screw driver

Step 1: Turn wagon upside-down. Fasten tie-rod to steering arm with lock-nut, leaving enough clearance for free movement.

Step 2: Slide wheels onto axle. With light blows, use hammer to drive axle caps onto axles.

Step 3: Using 9/16" wrenches fasten tongue to steering arm with 3/8"X 3"bolt and locknut. Do not over tighten.

Step 4: Using a #3 philips screw driver and a 7/16" wrench, fasten wagon body to chassis with stainless steel screws and lock nuts (CW111). Tighten screws to a snug fit; do not over-tighten.

Part no.	No. used	Description
CW 100	1	Body (specify color)
CW102	1	Chassis
CW103	1	Handle
CW104	1 pr.	Grips
CW105	1	Tie Rod
CW106	1	Left Hand King Pin / Spindle
CW107	1	Right Hand King Pin / Spindle
CW108	4	Wheel Assembly (wheel, tire, tube and bearings)
CW109	4	Axle Caps (for wheels)
CW110	1	3/8 x 3 Bolt and Nut (for handle)
CW111	4	1/4" x 3/4" Stainless Screw and Lock Nut (for body)
CW112	3	5/16" x 1" Hex Head Screw & Lock Nut (steering assembly)

The DK Cruise-Along Trailer



Parts List for DK Cruise-Along trailer

- 1 Trailer box
- 1 Frame
- 2 Wheels
- 1 Hitch
- 1 Hitch pin
- 2 Axle caps
- 2 $\frac{1}{4}$ " x $1\frac{1}{2}$ " Hex head screws
- 2 Lock nuts
- 4 $\frac{1}{4}$ " x $\frac{3}{4}$ " Stainless steel Philips pan head screws
- 4 Stainless steel lock nuts

Instructions for Assembly

Tools needed: #3 Philips screwdriver, $\frac{7}{16}$ " wrench, hammer

Step 1: Using $\frac{7}{16}$ " wrench, securely fasten hitch to trailer frame with $\frac{1}{4}$ " x $1\frac{1}{2}$ " hex head screws.

Step 2: Slide wheels onto axle. With light blows, use hammer to drive axle caps onto axles.

Step 3: Attach box to frame with $\frac{1}{4}$ " x $\frac{3}{4}$ " Philips pan head screws. Do not over tighten.

Our # 1 Question How Much will it hold?



**We really don't know
for sure.**

**But we do know that it
will hold at least 1076 lbs.**

**The Dirt King tricycles
from the Child's to
the Dually's to the
WindRoamer
and Little Twister
are all built to
last for generations
of fun and exercise!**

He is 20
years old
now.



**Still has the trike and
his other three siblings also used it.**





2011 Preferred Vendor

**HEAD START
BODY START**

National Center for
Physical Development
and Outdoor Play

www.headstartbodystart.org



*Associations
of the American Alliance
for Health, Physical Education,
Recreation and Dance*



National Association for
Sport and Physical Education



Product Warranty

Part or model specifications are subject to change without notice. MCM Manufacturing Inc. has earned the Dirt King brand theme, “Worlds Best Tricycle”. We will honor our warranty should you experience any problem with this product. With over 20 years of high quality manufacturing craftsmanship, the Dirt King trike has survived extraordinary use and abuse in Day Care, Pre-school settings and passing the test of time.

The Dirt King Trike warranty pertains to the original owner and is not transferrable. There are no other express warranties for the Dirt King Brand tricycle manufactured by MCM Manufacturing, Inc., WaKeeney, Kansas.

This warranty is unconditional for the durability of the steel frame and welds under uses intended for this product. A conditional or limited warranty covers all other component parts of the tricycle.

The frame, fork and welds on the Dirt King Brand tricycle manufactured by MCM Manufacturing Inc. are warranted for life. All other component parts are warranted for twelve (12) months from date of purchase.

MCM Manufacturing Inc. will replace any frame, fork or component part found to be defective at no charge. Original owner will be responsible for transportation charges under the conditions of this warranty.

Your purchase of a Dirt King Tricycle gives you legal rights expressed herein. Your State laws may entitle you to additional rights.

Contact Us

Dirt King Manufacturing & Shipping

26021 Hwy 40

WaKeeney, KS 67672

(785) 743-2026 - (785) 743-2458 Fax

By Email: info@dirtkingusa.com

Mon - Fri: 7:00AM to 12:00PM & 1:00PM to 5PM CDT

Standard Return Policy

You can initiate a return for unopened or unused items within 30 days of delivery for a full refund. * You must return items in unused condition with all original materials included with the shipment. We must receive your returned items at our shipping and delivery facility within 45 days of delivery. We inspect all returned items and award a partial refund for opened or used products. If the return is a result of our error or defective product, we will refund the full cost of the merchandise and shipping charges.

*If you initiate a return **after 30 days**, MCM Manufacturing, Inc. may issue a partial refund depending on elapsed time and condition.